



MICAPS E3CMOS16000CA

C-mount USB 3.0 CMOS Cameras
Aptina CMOS Sensor



The ECO3CMOS16000CA is a high-performance USB 3.0 camera featuring either an OnSemi or Panasonic CMOS sensor for fast, detailed image capture. It supports 16MP resolution and comes in a compact CNC aluminum alloy body. With its advanced 12-bit Super-fine™ Hardware Image Signal Processor (HISP VP), it handles tasks like demosaicing, auto exposure, gain and white balance adjustments, color correction, gamma, contrast, and more—offloading processing from the PC and significantly improving speed. It comes with the powerful MicroView software for video and image processing and supports Windows, Linux, macOS, and Android. SDKs are available in C/C++, C#/VB.NET, Python, Java, DirectShow, Twain, and more. Ideal for well-lit environments and microscope image capture, the ECO3CMOS16000CA camera ensures smooth performance and higher frame rates.

Features

- Standard C-Mount Camera with Aptina CMOS sensor
- Integrated zinc aluminum alloy housing
- With hardware resolution 16M
- USB3.0 5Gbps interface ensuring high speed data transmission
- Super-Fine color engine with perfect color reproduction capability
- With advanced video & image processing application MicroView
- Windows/Linux/macOS/Android multiple platform SDK

Applications

- Digital laboratory, medical research
- Industrial visual (PCB examination, IC quality control)
- Medical treatment (pathological observation)
- Food (microbial colony observation and counting)
- Aerospace, military (high sophisticated weapons)
- Scientific research, education (teaching, demonstration and academic exchanges)

Model No.	Sensor & Size(mm)	Pixel(μm)	G Sensitivity Dark Signal SNRMAX	FPS/Resolution	Binning	Exposure
E3CMOS16000CA	16M/MN34120(C) 1/2.33"(6.18x4.66)	1.335x1.335	R:2453LSB Gr: 2444LSB Gb:1054LSB B:996LSB	6@4632x3488 15@2320x1740 26.0@1536x1160	1x1 2x2 3x3	0.2ms~2s

C: Color

Other Hardware Configuration


Spectral Range	380-650nm (with IR-cut Filter)
White Balance	ROI White Balance/ Manual Temp-Tint Adjustment/NA for Monochromatic Sensor
Color Render Technique	Super Fine Color Engine/NA for Monochromatic Sensor
Capture/Control SDK	Windows/Linux/macOS/Android Multiple Platform SDK(Native C/C++, C#/VB.NET, Python, Java, DirectShow, Twain, etc)
ADC	8 Bit
Recording System	Still Picture and Movie
Cooling System*	Natural

Operating Environment

Operating Temperature	-10 °C~ 50 °C
Storage Temperature	-20 °C~ 60 °C
Operating Humidity	30~80%RH
Storage Humidity	10~60%RH
Power Supply	DC 5V over PC USB Port,

Software Environment

Operating System	Support Microsoft Windows XP / Vista / 7 / 8 / 10(32 & 64 bit)OS X (Mac OS X), Linux
PC Requirements	CPU: Equal to Intel Core2 2.8GHz or Higher
	Memory: 2GB or More
	USB port: USB3.0 High-speed Port
	Display: 17" or Larger
	CD-ROM

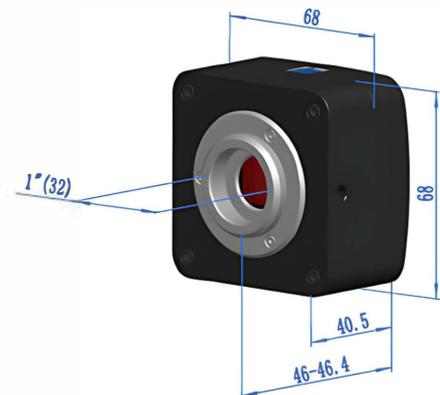

LABLINK INSTRUMENTS

- Plot no. 337, Sector 2, HSIIDC Saha, Saha, Ambala (Haryana) India - 133104.
- Plot no. 3-6-164/2, 2nd street, Hyderguda Himayatnagar, Hyderabad, (Telangana)India - 500029

Contact us:

Email:- info@lablinkinstruments.com
www.lablinkinstruments.com, www.micaps.com

