



MICAPS HPTEC3CMOS10300CA

C-mount USB 3.0 CMOS Cameras
SONY STARVIS CMOS Sensor



The HPTEC3CMOS10300CA camera utilizes a SONY STARVIS CMOS sensor for capturing images, and it connects via USB 3.0 for efficient data transfer. The HPTEC3CMOS10300CA hardware resolutions is 10.3MP, housed in a compact CNC aluminum alloy casing with Two-stage TE-cooling. Equipped with a two-stage peltier cooling system, the sensor chip can reach temperatures as low as -42 degrees below the ambient temperature. This feature significantly improves the signal-to-noise ratio and reduces image noise. The camera is designed with a smart structure to enhance heat radiation efficiency and prevent moisture-related issues. An controllable electric fan is incorporated to expedite the heat dissipation process.

The HPTEC3CMOS10300CA comes bundled with the advanced Micaps MicroView application for video and image processing. It supports multiple platforms, including Windows, Linux, macOS, and Android, with SDKs for various programming languages such as Native C/C++, C#/VB.NET, Python, Java, DirectShow, Twain, and more. This camera is well-suited for applications in low-light environments, as well as capturing and analyzing microscope fluorescence images. Additionally, it can be utilized for deep-sky astronomy applications.

Features

- SONY STARVIS CMOS sensor with USB 3.0 interface
- Peltier Sensor chip cooling up to 42°C below ambient temperature
- Working temperature can be regulated to specified temperature in 5 minutes
- Rolling Shutter
- IR-CUT/AR coated windows
- Up to 1 hour long time exposure
- Super-Fine™ color engine with perfect color reproduction capability Support both video and trigger modes

Applications

- Scientific research, education (teaching, demonstration and academic exchanges)
- Digital laboratory, medical research
- Industrial visual (PCB examination, IC quality control)
- Medical treatment (pathological observation)
- Food (microbial colony observation and counting)
- Aerospace, military (high sophisticated weapons)

| Model No. | Sensor & Size(mm) | Pixel(μm) | G Sensitivity Dark Signal | FPS/Resolution | Binning | Exposure |
|-------------------|--------------------------------------|------------|---------------------------------------|--|--------------------------|-----------|
| HPTEC3CMOS10300CA | 10.3M/IMX294(C) 4/3 "(19.11x13.0) | 4.63 x4.63 | 419mv with 1/30s 0.12mv with 1/30s | 30.0@4128x2808 38.5 @4096x2160 59.8@2048x1080 87.2@1360x720 8 Bit / 14 Bit | 1x1 1x1 2x2 3x3 | 0.15ms~1h |

Other Hardware Configuration


| | |
|---------------------------|---|
| Spectral Range | 380-650nm (with IR-filter), for Monochromatic Camera, AR Is Used |
| White Balance | ROI White Balance/ Manual Temp-Tint Adjustment |
| Color Rendering Technique | Super Fine Color Engine |
| Capture/Control SDK | Windows/Linux/macOS/Android Multiple Platform SDK (Native C/C++, C#/VB.NET, Python, Java, DirectShow, Twain, etc) |
| Recording System | Still Picture and Movie |
| Cooling System* | Two-stage TE-cooling System -42 °C below Camera Body Temperature |

Operating Environment

| | |
|-----------------------|---|
| Operating Temperature | -10 °C~ 50 °C |
| Storage Temperature | -20 °C~ 60 °C |
| Operating Humidity | 30~80%RH |
| Storage Humidity | 10~60%RH |
| Power Supply | DC 5V over PC USB Port, External Power Adapter for Cooling System, DC12V,3A |

Software Environment

| | |
|------------------|--|
| Operating System | Support Microsoft Windows XP / Vista / 7 / 8 / 10(32 & 64 bit) OS X (Mac OS X), Linux |
| PC Requirements | CPU: Equal to Intel Core2 2.8GHz or Higher |
| | Memory: 2GB or More |
| | USB port: USB2.0 High-speed Port |
| | Display: 17" or Larger |
| | CD-ROM |

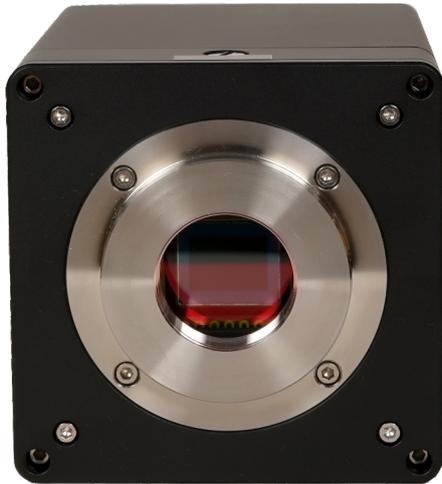

LABLINK INSTRUMENTS

- Plot no. 337, Sector 2, HSIIDC Saha, Saha, Ambala (Haryana) India - 133104.
- Plot no 3-6-164/2, 2nd Street, Hyderguda Himayatnagar, Hyderabad (Telangana)India - 500029

Contact us:

Email:- info@lablinkinstruments.com
www.lablinkinstruments.com, www.micaps.com

