




# MICAPS

## MTD1080P1330 HDMI Displayer

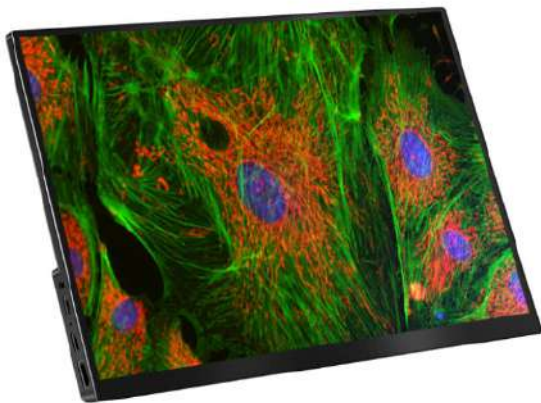

The MTD1080P1330 is designed to perfectly complement Micaps' ECO series HDMI cameras, providing a high-definition display solution that is simple, flexible, and user-friendly. It features a high-quality IPS (Super TFT) LCD panel, ensuring a wide viewing angle and excellent contrast for clear, vibrant imaging. When paired with an ECO HDMI camera, the MTD1080P1330 enhances overall system performance—delivering fast frame rates and accurate color reproduction, making it an ideal choice for real-time imaging applications.

### Features


- True 1080P HDMI displayer
- 13.3 inch active area
- IPS LCD panel, 178 degree wide viewing angle
- HDR dynamic image enhancement
- 72% SRGB primary gamut
- 400cd/m2display brightness, high contrast ratio up to 1000:1
- Standard HDMI interface
- 4mm narrow frame design on three sides, with 90% of the screen area, great visual experience
- No delay is felt with 3ms response, and dynamic definition is optimized to keep the picture stable and clear
- Without residual shadow
- Connect computer to realize screen projection, splitting and expansion
- Integrated invisible folding support, easy viewing angle adjustment
- Easy to connect with HDMI camera

| Model        | Active Area(Inch) | Video Fomat | Resolution | Contrast | Color Gamut | View Angle          | Touch Function |
|--------------|-------------------|-------------|------------|----------|-------------|---------------------|----------------|
| MTD1080P1330 | 13.3              | HDMI        | 1080P      | 1000:1   | 72% SRGB    | IPS Full View(178°) | Available      |

### Specification

| Basic performance      |                                                  |
|------------------------|--------------------------------------------------|
| MTD1080P1330           | Common/Touch, 2 means square                     |
| LCD Panel              | IPS LCD Screen(Super TFT)                        |
| Input Video Format     | HDMI                                             |
| Native Resolution      | 1920 x 1080                                      |
| Display Type           | 16:9 Ratio 13.3 Inch Active Matrix Super TFT LCD |
| Typical Contrast Ratio | 1000:1                                           |
| Colors                 | 16.7 Million                                     |
| Viewing Angle(L/R/U/D) | IPS Full View(178°)                              |
| Active Display Area    | 295mm(W) × 165mm(H)                              |
| Pixel Pitch            | 0.154(W) X 0.154(H) mm                           |
| Refresh Rate           | 60Hz                                             |
| Brightness             | 400cd/m 2                                        |
| Backlight              | LED Backlight, 50000 hours                       |

| Outline Parameter       |                                         |
|-------------------------|-----------------------------------------|
| Color                   | Black                                   |
| Dimension               | 306(L)*183(H)*8(T) mm                   |
| Weight                  | 450g                                    |
| Operating Environment   |                                         |
| Operating Temperature   | -15 Degree~55 Degree                    |
| Humidity Non Condensing | Operating:10%-90%, Storage: 5%-90%      |
| Synchronization Range   | 30-80 KHz Horizontal, 55-75 Hz Vertical |
| Power Supply            | AC110V-220V /DC5~12V(1A ) (Type C)      |
| Power Consumption       | Max 12W                                 |

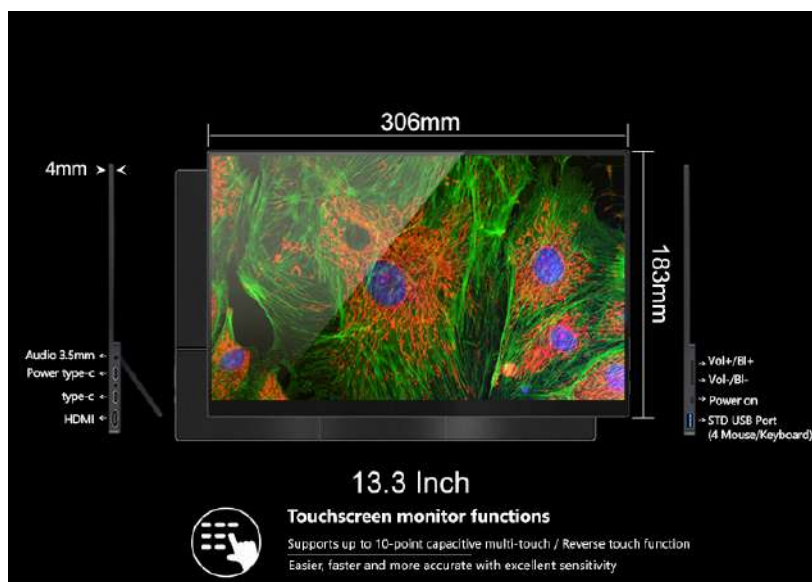

Dimension, Interface and Control Button of MTD1080P1330 Displayer



Back View of MTD1080P1330 Displayer and HDMI Camera's Connection

#### LABLINK INSTRUMENTS

- Plot no. 337, Sector 2, HSIIDC Saha, Saha, Ambala (Haryana) India - 133104.
- Plot no 3-6-164/2, 2nd Street, Hyderguda Himayatnagar, Hyderabad (Telangana )India - 500029

#### Contact us:

Email:- [info@lablinkinstruments.com](mailto:info@lablinkinstruments.com)  
[www.lablinkinstruments.com](http://www.lablinkinstruments.com), [www.micaps.com](http://www.micaps.com)

